

VOR/DME IDJ	APP CRS	Rwy Idg	7002
110.0	126°	TDZE	1391
Chan 37		Apt Elev	1391

VOR/DME RWY 13

BEMIDJI RGNL (BJI)

NA



When local altimeter setting not received, use Park Rapids altimeter setting and increase all MDA 100 feet, increase S-13 Cat C and D visibility ¼ mile. VDP NA with Park Rapids altimeter setting. For inoperative MALSR, increase S-13 Cat A and B visibility to 1 mile and Cat C and D visibility to 1½ mile. For inoperative MALSR when using Park Rapids altimeter setting, increase S-13 Cat A and B visibility to 1 mile and Cat C and D visibility to 1¾ mile. Helicopter visibility reduction below ¾ SM not authorized.

MALSR

A5

MISSED APPROACH:
Climb to 3100 direct IDJ VOR/DME and hold, continue climb-in-hold to 3100.

AWOS-3 119.275	MINNEAPOLIS CENTER 134.75 251.1	UNICOM 122.8 (CTAF)
-------------------	------------------------------------	------------------------------------

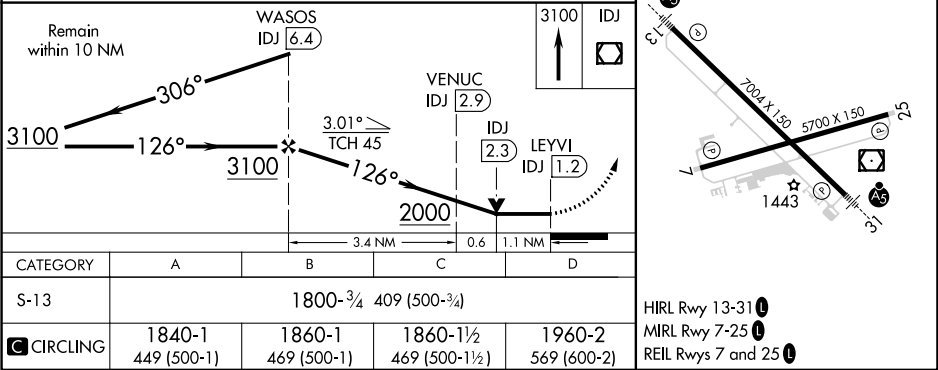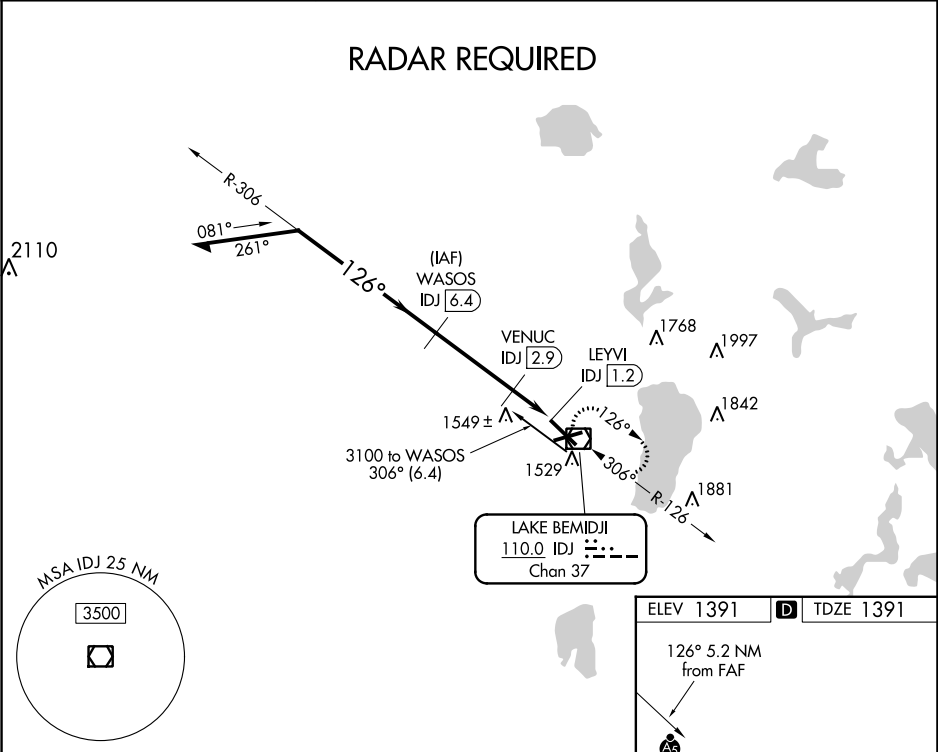

NC-1, 22 FEB 2024 to 21 MAR 2024

NC-1, 22 FEB 2024 to 21 MAR 2024