


WAAS CH 93513 W01A	APP CRS 010°	Rwy Idg 6604 TDZE 87 Apt Elev 91
--	------------------------	---

RNAV (GPS) RWY 1
H L SONNY CALLAHAN (CQF)

- | | | |
|-----------------|---|--|
| <p>A</p> | <p>Baro-VNAV NA when using Mobile Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. VDP NA with Mobile Intl altimeter setting. When local altimeter setting not received, use Mobile Intl altimeter setting and increase LPV DA to 329 feet, LNAV/VNAV DA to 517 feet, and all MDA 60 feet; increase LNAV Cats C/D visibility $\frac{1}{8}$ SM and Circling Cats C/D $\frac{1}{4}$ SM.</p> | <p>MISSED APPROACH:
Climb to 700 then climbing left turn to 2000 direct BFM. VORTAC and hold.</p> |
|-----------------|---|--|

AWOS-3PT 118.425	MOBILE APP CON ★ 118.5 269.3	UNICOM 123.0 (CTAF) 0
----------------------------	--	---------------------------------

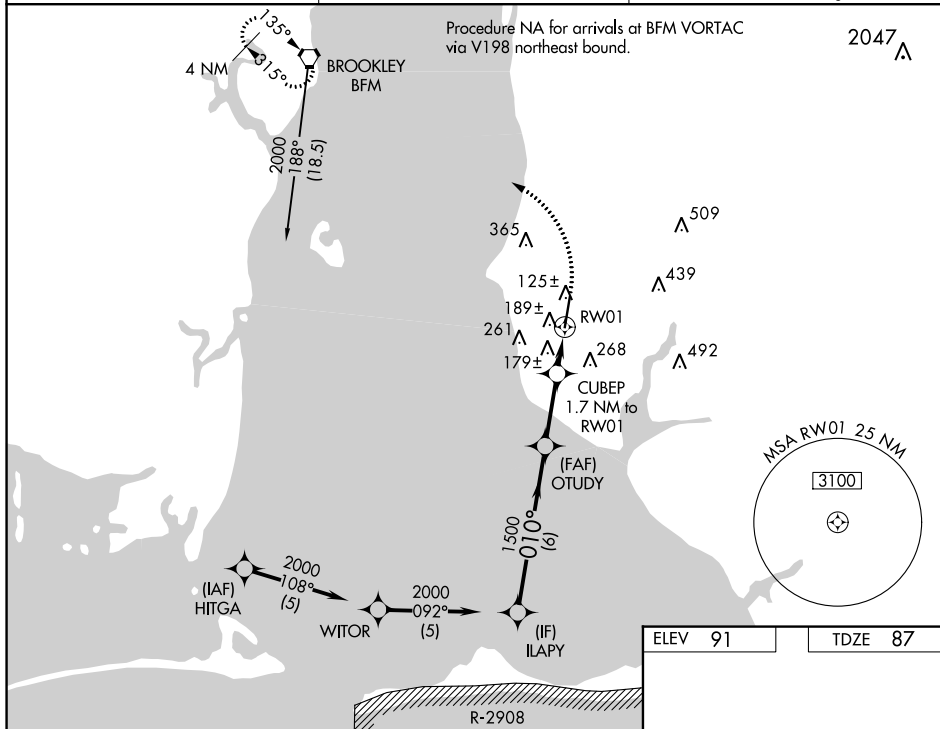

Procedure Turn NA

2000

GP 3.00°
TCH 35°

010°

1500

6 NM

2.6 NM

0.7 NM

1 NM

1.7 NM to RW01

*1 NM to RW01

*LNNAV only

*660

2000

700

2000

BFM

CATEGORY	A	B	C	D
LPV DA		287- $\frac{3}{4}$	200 (200- $\frac{3}{4}$)	
LNNAV/VNAV		475- $1\frac{3}{8}$	388 (400- $1\frac{3}{8}$)	
LNNAV MDA		440-1	353 (400-1)	
CIRCLING	560-1 469 (500-1)	580-1 489 (500-1)	720- $1\frac{3}{4}$ 629 (700- $1\frac{3}{4}$)	740-2 649 (700-2)