

WAAS CH 93738 W24A	APP CRS 240°	Rwy Idg TDZE 682 Apt Elev 682	8496
--	------------------------	---	-------------


RNAV (GPS) RWY 24
DECATUR (DEC)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.
Baro-VNAV and VDP NA when using Logan County altimeter setting.
When local altimeter setting not received, use Logan County altimeter setting; increase LPV DA to 1012 feet and visibility all Cats ¼ mile, LNAV/VNAV DA to 1168 feet and visibility all Cats ¼ mile; increase all MDA 80 feet and LNAV visibility Cats C/D ¾ mile, Circling visibility Cats C/D ¼ mile.

MISSED APPROACH:
Climb to 2300 direct FIKDO and hold.

ATIS 126.35	CHAMPAIGN APP CON* 132.85 290.225	DECATUR TOWER* 118.9 (CTAF) 291.775	GND CON 121.75 291.775	UNICOM 122.95
-----------------------	---	---	----------------------------------	-------------------------

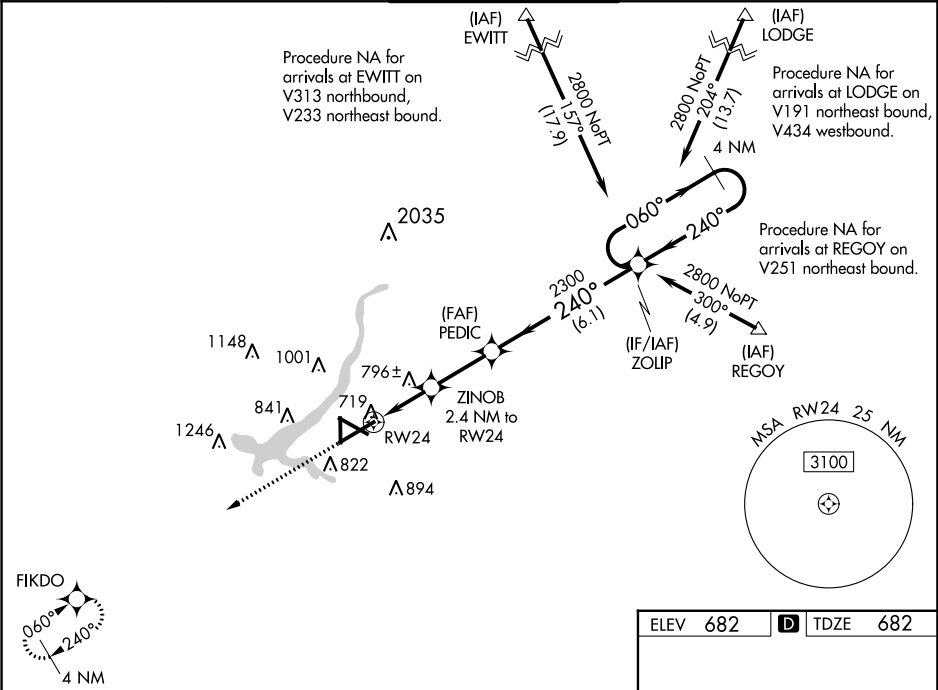

2300 FIKDO		*LNAV only.		*1 NM to RW24		*1500		2300		240°		ZINO 2.4 NM to RW24		PEDIC		ZOLIP		4 NM Holding Pattern		GP 3.00° TCH 52	
RW24		1 NM		1.4 NM		2.5 NM		6.1 NM													
CATEGORY		A		B		C		D													
LPV DA				932-¾		250 (300-¾)															
LNAV/VNAV DA				1088-1⅜		406 (500-1⅜)															
LNAV MDA				1060-1		378 (400-1)															
CIRCLING		1140-1 458 (500-1)		1240-1 558 (600-1)		1360-2 678 (700-2)		1360-2¼ 678 (700-2¼)													

ELEV 682 TDZE 682

REIL Rwy 36
HIREL Rwy 6-24
MIREL Rws 12-30 and 18-36