

VORTAC SAX 115.7 Chan 104	APP CRS 345°	Rwy Idg TDZE Apt Elev	N/A N/A 422
---	------------------------	-----------------------------	--


VOR-A
SUSSEX (F'WN)




When local altimeter setting not received, use Teterboro altimeter setting and increase all MDA 140 feet and ANKLE FIX Minimums Cats A & B visibility ¼ mile and Cat C ½ mile. Procedure NA at night. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climbing right turn to 3000 direct SAX VORTAC and hold.

ASOS 118.525	NEW YORK APP CON 127.6 379.9	UNICOM 122.7 (CTAF)
------------------------	--	-------------------------------

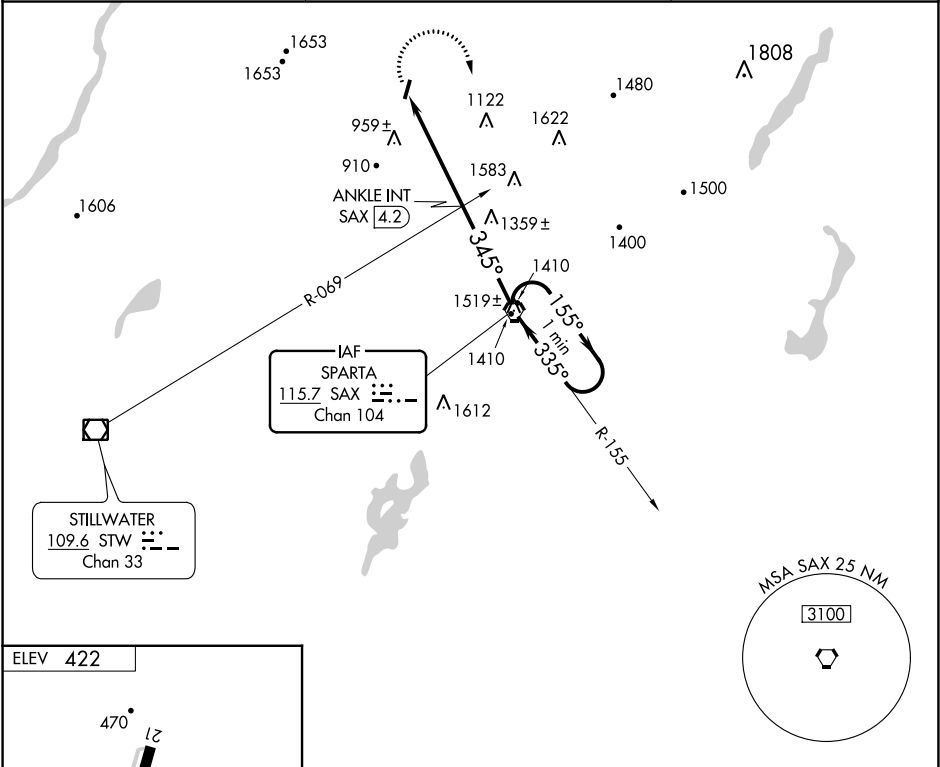

ELEV **422**

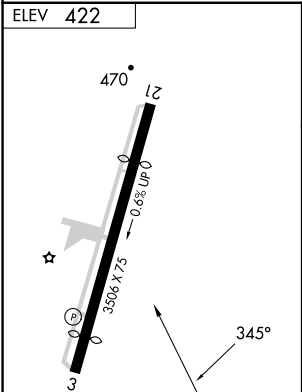

MIRL Rwy 3-21
REIL Rwy 3 and 21

FAF to MAP 8.6 NM

Knots	60	90	120	150	180
Min:Sec	8:36	5:44	4:18	3:26	2:52

 SAX	*1960 when using Teterboro altimeter setting.			
 SAX VORTAC	One Minute Holding Pattern			
ANKLE INT SAX (4.2)	155° → 3000 ← 335°			
SAX (8.6)	4.4 NM 4.2 NM			
CATEGORY	A	B	C	D
 CIRCLING	1820-1¼ 1398 (1400-1¼)	1820-1½ 1398 (1400-1½)	1820-3 1398 (1400-3)	NA
ANKLE FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
 CIRCLING	1300-1 878 (900-1)	1300-1¼ 878 (900-1¼)	1300-2½ 878 (900-2½)	NA