

MAYNR ONE DEPARTURE (RNAV)
(MAYNR1.MAYNR) 19MAY22

HOMESTEAD, FLORIDA
HOMESTEAD ARB (KHST)

ATIS ★
132.275 269.9
CLNC DEL
121.75 275.8
GND CON
121.75 275.8
HOMESTEAD TOWER
133.45 279.55
MIAMI DEP CON
125.5 354.1

RNAV1 - DME/DME/IRU or GPS.
From SLIPT to MAXIM: RNAV 1- GPS.
From SLIPT to CANOA: RNAV 1- GPS.
RADAR required.

**TOP ALTITUDE:
ASSIGNED BY ATC**

(MAYNR1.MAYNR) 22139
AL-424 (FAA)
MAYNR ONE DEPARTURE (RNAV)

HOMESTEAD ARB (KHST)
HOMESTEAD, FLORIDA


TAKEOFF MINIMUMS

Rwy 6: Standard with minimum climb of 500' per NM to 1800.

Rwy 24: Standard with minimum climb of 500' per NM to 2200.

NOTE: Jet aircraft only.

NOTE: Accelerate to 250K, if unable, advise ATC.

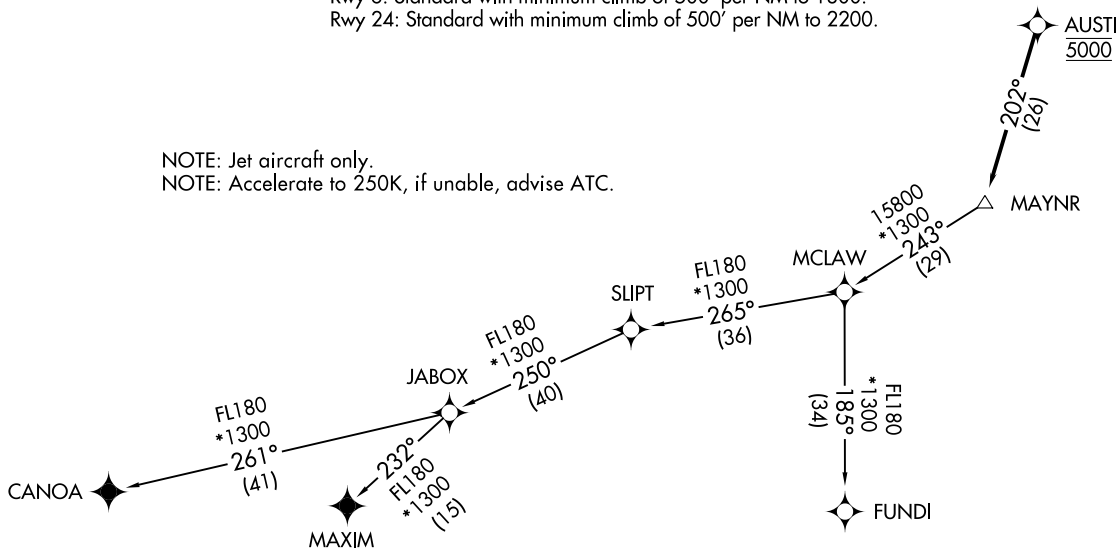

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 6, 24: Climb on heading assigned by ATC for vectors to cross AUSTI at 5000, thence. . . .

. . . .on track 202° to MAYNR, then on assigned transition, maintain altitude as assigned by ATC, expect clearance to filed altitude within 10 minutes after departure.

CANOA TRANSITION (MAYNR1.CANOA)

FUNDI TRANSITION (MAYNR1.FUNDI)

MAXIM TRANSITION (MAYNR1.MAXIM)

SE-3, 22 FEB 2024 to 21 MAR 2024

SE-3, 22 FEB 2024 to 21 MAR 2024