

APP CRS	Rwy Idg	6300
006°	TDZE	6431
	Apt Elev	6451

RNAV (RNP) Z RWY 1

JACKSON HOLE (JAC)


RNP AR APCH.

For uncompensated Baro-VNAV systems, procedure NA below -27°C or above 54°C.
Inop table does not apply to RNP 0.11* all Cats visibility.
For inop ALS, increase RNP 0.30* all Cats visibility to ¾ SM.
Missed approach requires RNP less than 1.0.

MALS


MISSSED APPROACH: Climb to 14000 on track 007° to UBEVE and track 007° to QUIRT and track 088° to DNW VOR/DME and hold, continue climb-in-hold to 14000.
* Missed approach requires minimum climb of 330 feet per NM to 8200; if unable to meet climb gradient, see RNAV (RNP) Y RWY 1.

D-ATIS 120.625	SALT LAKE CENTER 133.25 285.6	JACKSON TOWER* 118.075 (CTAF)	GND CON 124.55	UNICOM 122.95
-------------------	----------------------------------	----------------------------------	-------------------	------------------

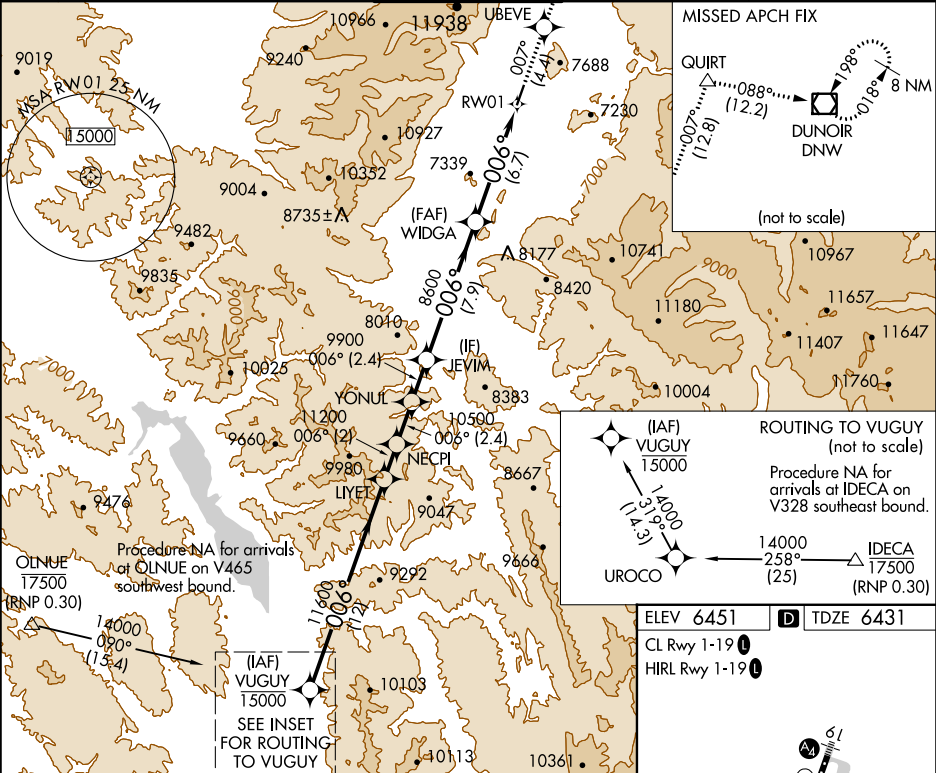

VUGUY	14000	UBEVE	QUIRT	DNW
11600	11200	10500	8600	
GP 3.00°				
TCH 50				
12 NM	2 NM	2.4	2.4	7.9 NM
6.7 NM				
CATEGORY	A	B	C	D
RNP 0.11 DA*	6690-¾	259 (300-¾)		
RNP 0.30 DA*	6743-¾	312 (300-¾)		

AUTHORIZATION REQUIRED

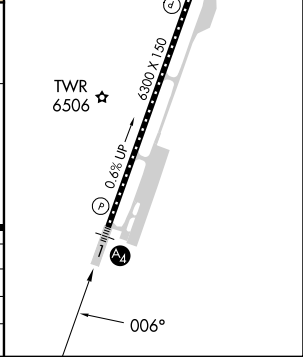

NW-1, 22 FEB 2024 to 21 MAR 2024

NW-1, 22 FEB 2024 to 21 MAR 2024