

FRANKFORT, INDIANA

AL-6194 (FAA)

23278

WAAS CH 65734 W27A	APP CRS 272°	Rwy Idg 5000 TDZE 861 Apt Elev 861
--	------------------------	---

RNAV (GPS) RWY 27
FRANKFORT CLINTON COUNTY RGNL (FKR)

RNP APCH - GPS.




Circling Rwy 4, 22 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH:
Climb to 2500 direct
HULOL and hold.



AWOS-3
124.325

GRISSOM APP CON ★
123.85 291.675

UNICOM
123.0 (CTAF) **L**



A1557

(IAF) WONPIU 

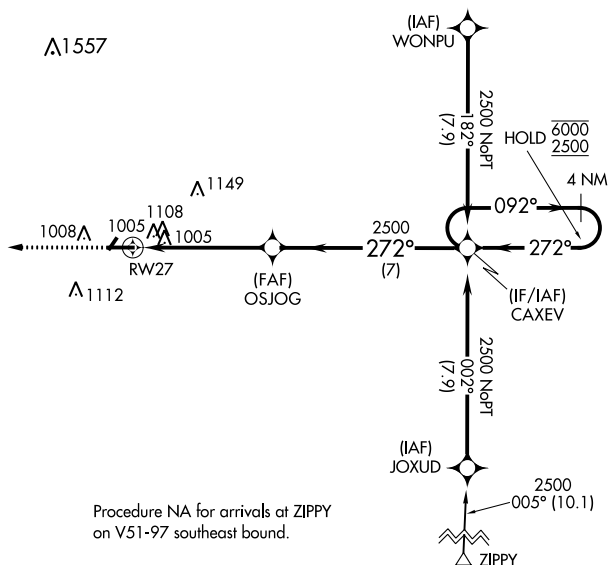

Procedure NA for arrivals at ZIPPY
on V51-97 southeast bound.

ELEV	861		TDZE	861
------	-----	--	------	-----

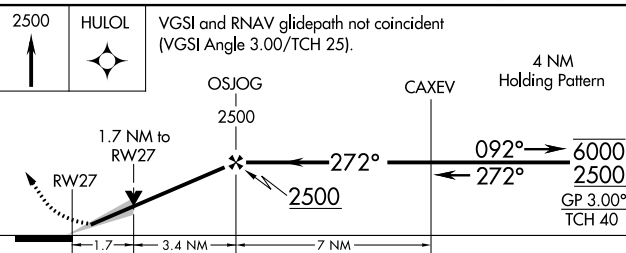

CATEGORY	A	B	C	D
LPV DA	1111-3 $\frac{3}{4}$ 250 (300-3 $\frac{3}{4}$)			
LNAV/ VNAV DA	1476-1 $\frac{3}{4}$ 615 (700-1 $\frac{3}{4}$)			
LNAV MDA	1420-1 559 (600-1)		1420-1 $\frac{5}{8}$ 559 (600-1 $\frac{5}{8}$)	
 CIRCLING	1460-1 599 (600-1)		1520-1 $\frac{3}{4}$ 659 (700-1 $\frac{3}{4}$)	1520-2 659 (700-2)

MIRL Rwy 9-27 and 4-22 **L**
REIL Rwy 9 and 27 **L**

FRANKFORT, INDIANA
Amdt 1B 19MAY22

FRANKFORT CLINTON COUNTY RGNL (FKR)
RNAV (GPS) RWY 27

40°16'N-86°34'W

EC-2, 22 FEB 2024 to 21 MAR 2024

WAAS CH 62834 W09A	APP CRS 092°	Rwy Idg TDZE Apt Elev	5000 856 861
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 9

FRANKFORT CLINTON COUNTY RGNL (F'KR)


▼

NA

Baro-VNAV NA when using Indianapolis Exec altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Indianapolis Exec altimeter setting. When local altimeter setting not received, use Indianapolis Exec altimeter setting: increase LPV DA to 1162 feet and visibility 1⁄8 SM all Cats; increase LNAV/VNAV DA to 1245 feet and visibility 1⁄8 SM all Cats; increase all MDAs 60 feet and LNAV and Circling Cats C/D visibilities 1⁄4 SM.

MISSED APPROACH:
Climb to 2500 direct
CAXEV and hold.

AWOS-3 124.325	GRISCOM APP CON ★ 123.85 291.675	UNICOM 123.0 (CTAF) 0
--------------------------	--	---------------------------------

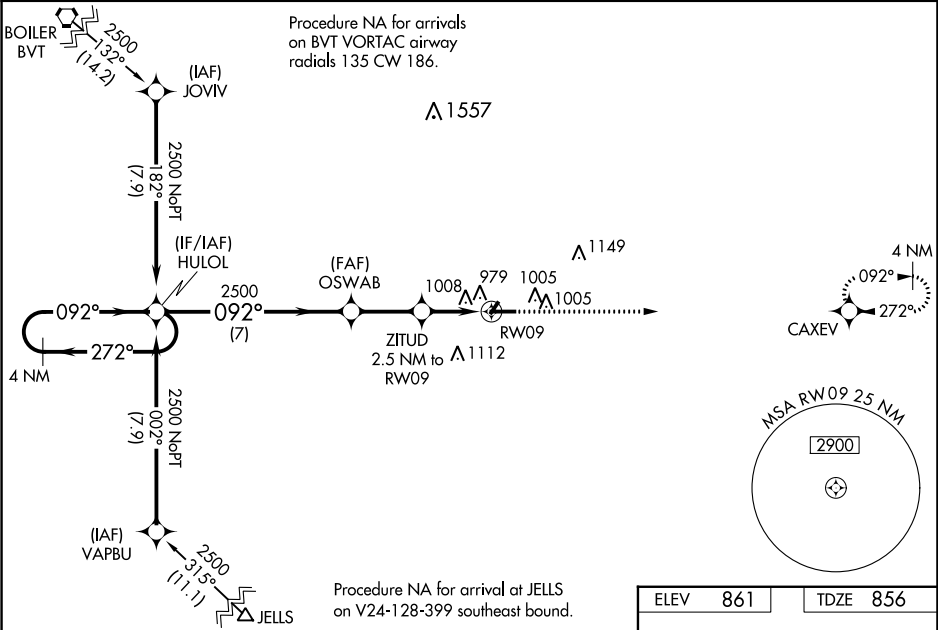

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 25).

4 NM
Holding Pattern

HULOL

OSWAB

ZITUD
2.5 NM to
RW09

CAXEV

2500

2500

*1680

*1.1 NM to
RW09

RW09

7 NM

2.5 NM

1.4

1.1

*LNAV only.

CATEGORY	A	B	C	D
LPV DA	1106-7⁄8 250 (300-7⁄8)			
LNAV/VNAV DA	1189-1 333 (400-1)			
LNAV MDA	1260-1	404 (400-1)	1260-1 1⁄8	404 (400-1 1⁄8)
CIRCLING	1460-1	599 (600-1)	1520-1 3⁄4 659 (700-1 3⁄4)	1520-2 659 (700-2)

MIRL Rwy 4-22 and 9-27 0

REIL Rwy 9 and 27 0