


WAAS CH 48817 W02A	APP CRS 016°	Rwy Idg TDZE Apt Elev	5001 580 580
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 2

HENRY COUNTY (PHT')

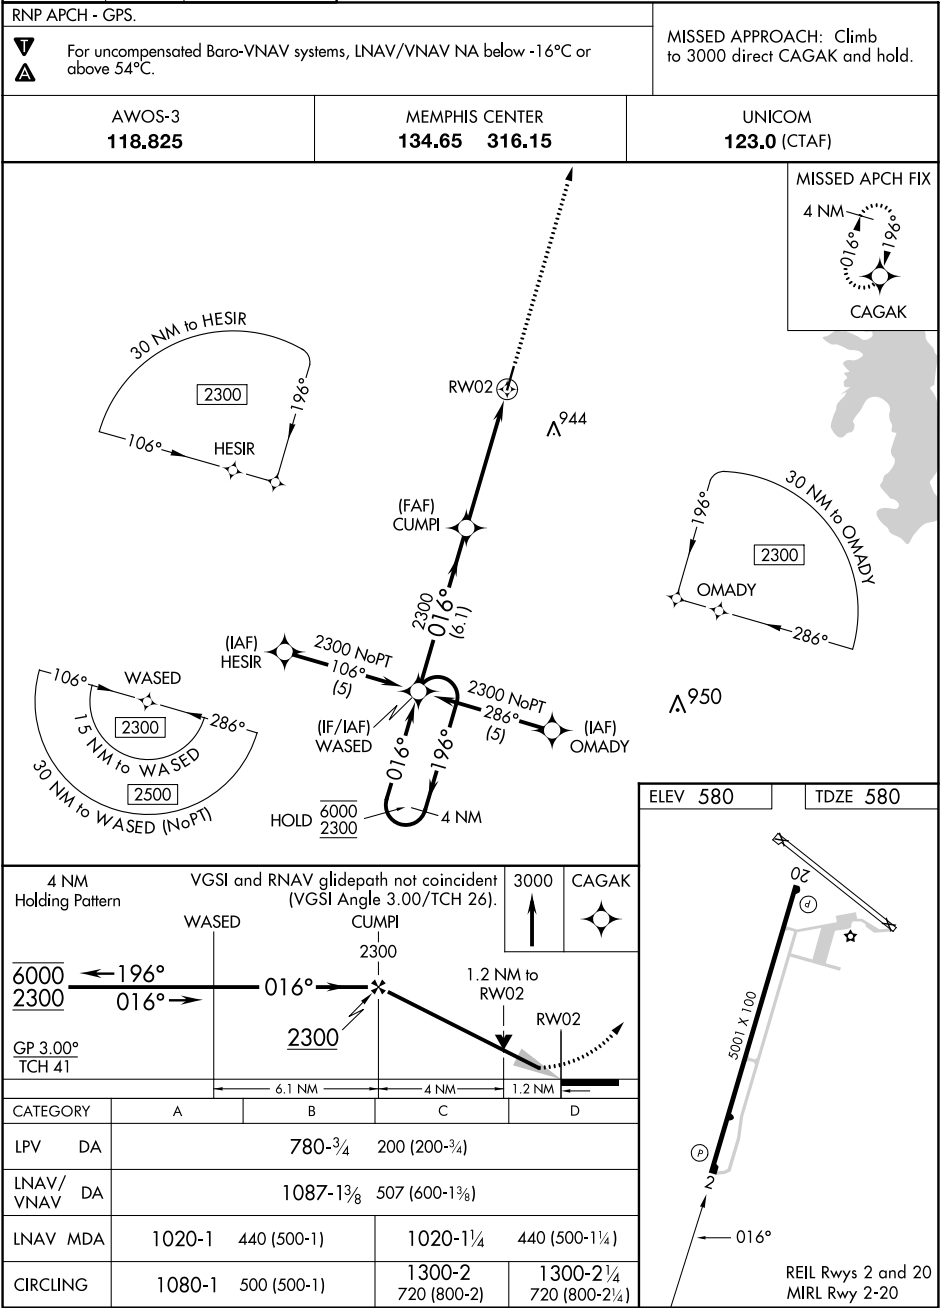

WAAS CH 42717 W20A	APP CRS 196°	Rwy Idg TDZE Apt Elev	5001 571 580
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 20

HENRY COUNTY (PHT)

RNP APCH - GPS.



▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH:
Climb to 2300 direct
WASED and hold.

AWOS-3 118.825	MEMPHIS CENTER 134.65 316.15	UNICOM 123.0 (CTAF)
--------------------------	--	-------------------------------

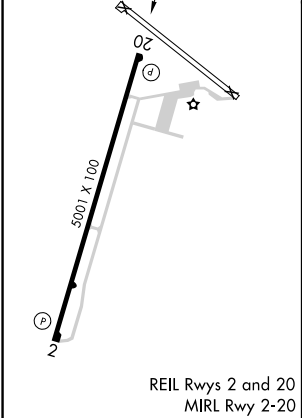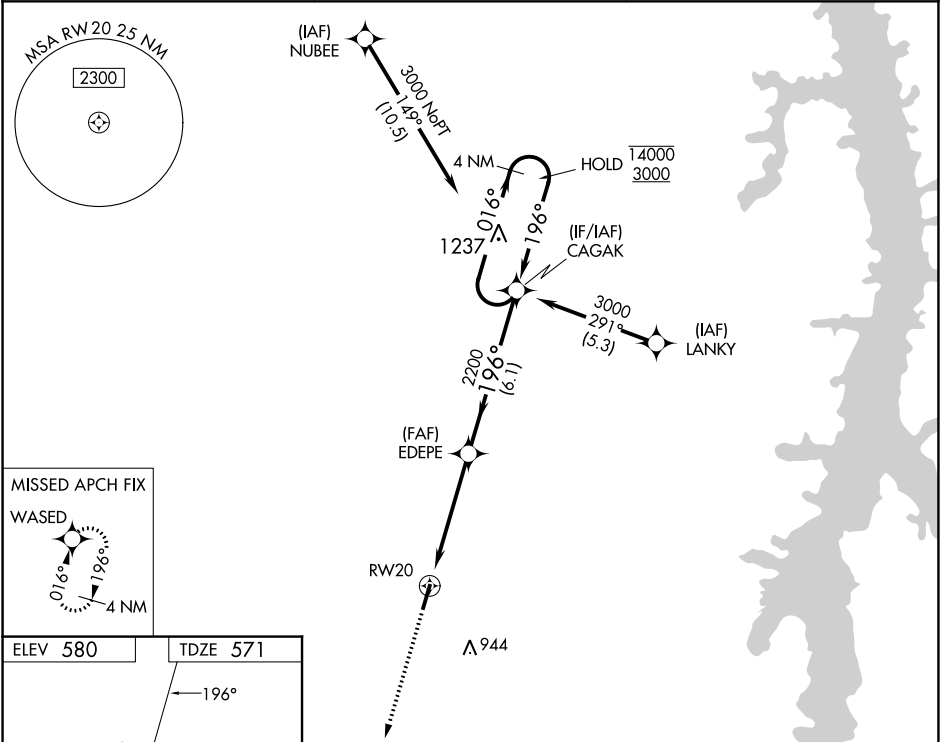

2300	WASED	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 21).				4 NM	Holding Pattern	
			EDEPE	2200	196°	016°	14000	3000
		1.5 NM to RW20						
		1.5 NM	3.4 NM	6.1 NM				
CATEGORY	A	B	C	D				
LPV DA	821-1		250 (300-1)					
LNAV/VNAV DA	917-1¼		346 (400-1¼)					
LNAV MDA	1060-1	489 (500-1)	1060-1½ 489 (500-1½)	1060-1½ 489 (500-1½)				
CIRCLING	1080-1	500 (500-1)	1300-2 720 (800-2)	1300-2¼ 720 (800-2¼)				