


WAAS CH 99611 W32A	APP CRS 323°	Rwy Idg 9001 TDZE 1293 Apt Elev 1297	RNAV (GPS) RWY 32 MANSFIELD LAHM RGNL (MFD)	
Baro-VNAV NA when using Marion altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. When local altimeter not received, use Marion altimeter setting and increase all DA 107 feet and all MDA 120 feet, LNAV/VNAV all Cats visibility ½ SM, LNAV Cat C/D visibility ⅔ SM and Circling Cat C/D visibility ½ SM. For inop MALS when using Marion altimeter setting increase LPV all Cats visibility to 1. VDP NA with Marion altimeter setting. ** RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Marion altimeter setting.			MALS	MISSED APPROACH: Climb to 3000 direct UPIYO and hold.
ATIS 125.3	CLEVELAND APP CON ★ 124.2 360.65	MANSFIELD TOWER ★ 119.8 (CTAF) 0291.775	GND CON 121.8 291.775	UNICOM 122.95

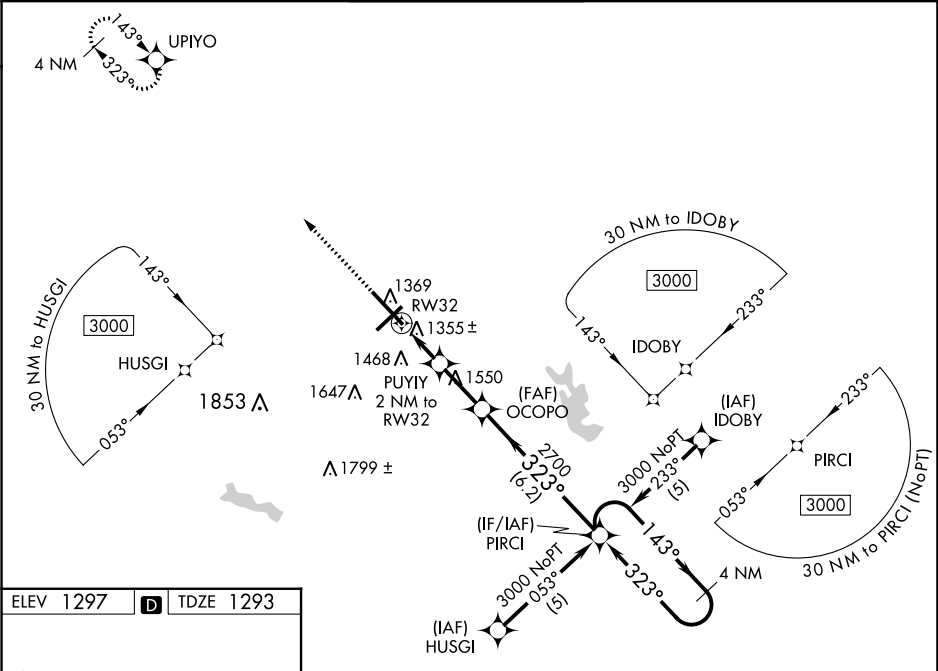

ELEV 1297	D	TDZE 1293
HIRL Rwy 5-23 and 14-32 REIL Rwy 5 and 23		
3000 UPIYO		
*LNAV only		
*1 NM to RW32		
*1960		
2700		
6.2 NM		
CATEGORY	A	B
LPV DA**	1493/24	200 (200-½)
LNAV/VNAV DA	1789/60	496 (500-1¼)
LNAV MDA	1660/24	367 (400-½)
CIRCLING	1760-1	463 (500-1)
		2000-2
		703 (800-2)
		2000-2 ¼
		703 (800-2 ¼)