

WAAS CH 42600 W04A	APP CRS 043°	Rwy Idg 5764 TDZE 2634 Apt Elev 2634
--	------------------------	---


RNAV (GPS) RWY 4
FRANK WILEY FLD (MLS)

RNP APCH-GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C. When local altimeter setting not received, use Glendive altimeter setting: increase LPV and LNAV/VNAV DA to 3051 and all visibilities ½ SM. Increase all MDA 180 feet and LNAV Cat C and D visibilities ½ SM and Circling Cat C and D visibilities ½ SM. Baro-VNAV and VDP NA when using Glendive altimeter setting.

MISSED APPROACH: Climb to 6000 direct AXUPE and hold, continue climb-in-hold to 6000.

ASOS 135.575	SALT LAKE CENTER 126.85 305.2	UNICOM 123.0 (CTAF) 1
------------------------	---	---------------------------------

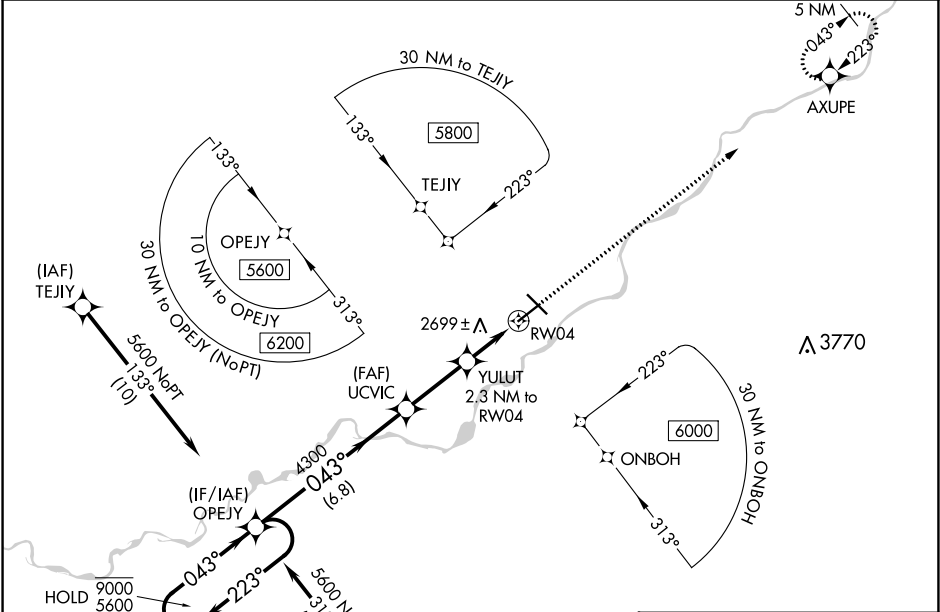

5 NM Holding Pattern

9000
5600

GP 3.00°
TCH 40

OPEJY

UCVIC

YULUT 2.3 NM to RW04

AXUPE

6000

223°

043°

043°

043°

223°

2684

6.8 NM

2.8 NM

1.2 NM

1.2 NM

CATEGORY	A	B	C	D
LPV DA	2884-1 250 (300-1)			
LNAV/VNAV DA	2884-1 250 (300-1)			
LNAV MDA	3040-1	406 (500-1)	3040-1½	406 (500-1½)
CIRCLING	3060-1 426 (500-1)	3100-1 466 (500-1)	3160-1½ 526 (600-1½)	3320-2¼ 686 (700-2¼)

MIRL Rwy 4-22 and 13-31 1
REIL Rwy 4, 13, 22 and 31 1

NW-1, 22 FEB 2024 to 21 MAR 2024

NW-1, 22 FEB 2024 to 21 MAR 2024