

LOC I-MMU	APP CRS	Rwy Idg	5998
110.3	229°	TDZE	184
		Apt Elev	187

ILS or LOC RWY 23

MORRISTOWN MUNI (MMU)

RNAV 1-GPS or RADAR required for procedure entry.
From EMRSN: RNAV 1-GPS required.

MALSR


MISSED APPROACH: Climb to 2000 on heading 229° and on SBJ VOR/DME R-070 to SBJ VOR/DME and hold.

▼

▲

Circling to Rwy 13, 31 NA at night. Autopilot coupled approach NA below 732. For inop ALS, increase S-LOC 23 Cats C/D visibility to 1 3⁄8 SM.

ATIS	NEW YORK APP CON	MORRISTOWN TOWER ★	GND CON	CLNC DEL
124.25	127.6 379.9	118.10 (CTAF) 353.9	134.2	128.6

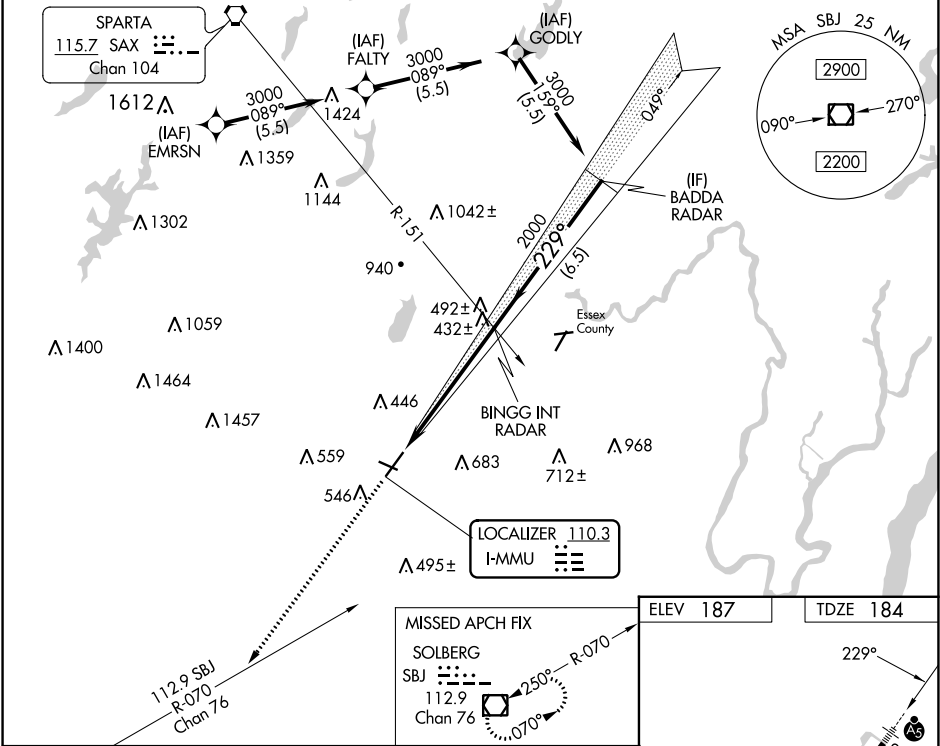

CATEGORY	ELEV 187 TDZE 184			
	2000 hdg 229° SBJ R-070 BINGG INT RADAR BADDA RADAR GS 3.00° TCH 55			
	5.5 NM 6.5 NM			
	A	B	C	D
S-ILS 23	384-1⁄2 200 (200-1⁄2)			
S-LOC 23	700-1⁄2 516 (600-1⁄2)	700-1 516 (600-1)		
CIRCLING	860-1 673 (700-1)	900-1 713 (800-1)	1000-2 813 (900-2 1⁄2)	1200-3 1013 (1100-3)

