

WAAS CH 40206 W03A	APP CRS 031°	Rwy Idg TDZE Apt Elev	7707 410 410
--	------------------------	-----------------------------	---

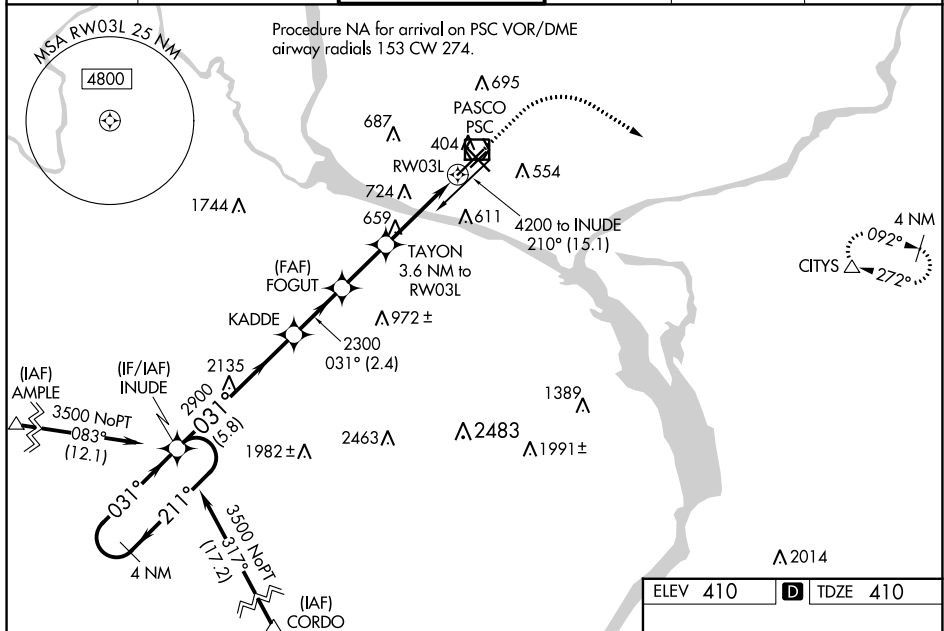
RNAV (GPS) Y RWY 3L
TRI-CITIES (PSC)

RNP APCH.

V Baro-VNAV NA when using Hermiston altimeter setting. For uncompensated Baro-VNAV systems, **A** LNAV/VNAV NA below -14°C or above 54°C. VDP NA with Hermiston altimeter setting. When local altimeter setting not received, use Hermiston altimeter setting: increase all DA 95 feet and all MDA 100 feet. Increase LPV all Cats visibility $\frac{1}{4}$ mile, LNAV/VNAV all Cats visibilities $\frac{3}{8}$ mile: increase LNAV Cats C and D visibility $\frac{3}{8}$ mile. Circling Cat C and D visibility $\frac{1}{4}$ mile.

MISSED APPROACH:
Climb to 1000 then
climbing right turn to
3200 direct CITYS
and hold.

ATIS 125.65	SPOKANE APP CON* 128.75 377.2	TRI-CITIES TOWER* 135.3 (CTAF) 0 323.3	GND CON 121.8	CLNC DEL 120.0	UNICOM 122.95
----------------	----------------------------------	---	------------------	-------------------	------------------

[illegible]

CATEGORY		A	B	C	D
LPV	DA	610-3¼ 200 (200-¾)			
LNAV/ VNAV	DA	708-1 298 (300-1)			
LNAV	MDA	920-1 510 (600-1)		920-1¾ 510 (600-1¾)	
C CIRCLING		920-1 510 (600-1)	940-1 530 (600-1)	1040-1¾ 630 (700-1¾)	1100-2¼ 690 (700-2¼)

