


WAAS CH 48809 W29A	APP CRS 288°	Rwy Idg TDZE Apt Elev	5001 790 790
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 29
FULTON COUNTY (R/C/R)

⚠ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). When local altimeter setting not received, use Goshen altimeter setting: increase LPV DA to 1208 feet and visibility all Cats ½ SM; increase LNAV/VNAV DA to 1325 and visibility all Cats ½ SM; increase all MDA 100 feet and visibility LNAV Cats C and D and Circling Cats C and D ¼ SM. Baro-VNAV and VDP NA when using Goshen altimeter setting.

MISSED APPROACH: Climb to 3000 direct KOMEC and hold.

AWOS-3 118.775	SOUTH BEND APP CON★ 132.05 257.8	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

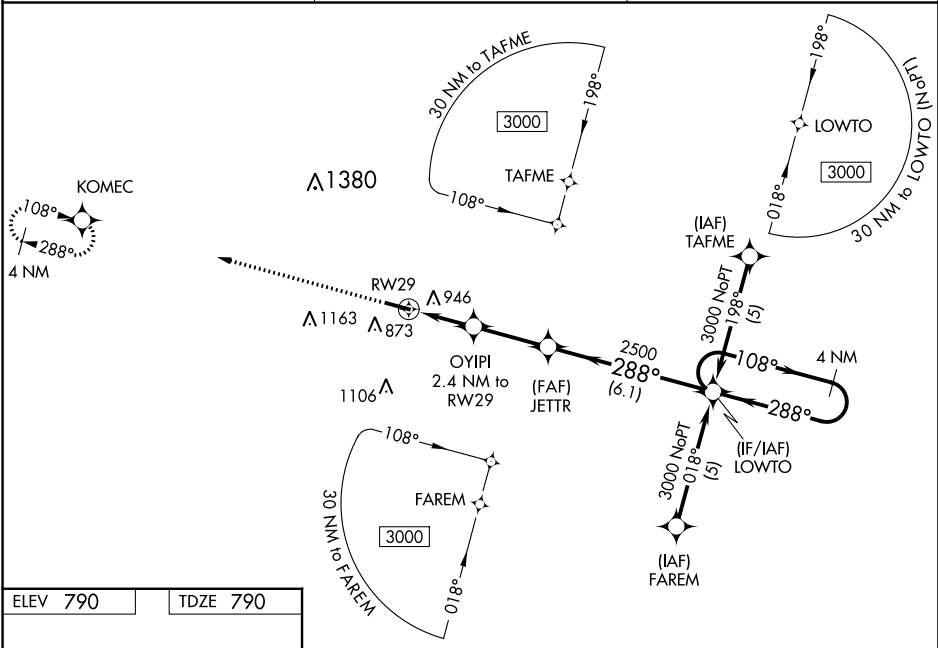

ELEV 790 TDZE 790

REIL Rwy 11 and 29 0
MIRL Rwy 11-29 0

5001 X 75
29
288°

3000 KOMEC VGSI and RNAV glidepath not coincident (VGSI Angle 3.38/TCH 30). 4 NM Holding Pattern				
*LNAV only. OYIPI 2.4 NM to RWY29 JETTR 288° 3000 GP 3.00° TCH 45				
*0.9 NM to RWY29 *1600 2500				
0.9 NM 1.5 NM 2.8 NM 6.1 NM				
CATEGORY	A	B	C	D
LPV DA	1127-1¼ 337 (400- 1¼)			
LNAV/VNAV DA	1244-1½ 454 (500- 1½)			
LNAV MDA	1200-1	410 (500-1)	1200-1¼	410 (500-1¼)
CIRCLING	1280-1 490 (500-1)	1360-1 570 (600-1)	1480-2 690 (700-2)	1620-2¾ 830 (900-2¾)