
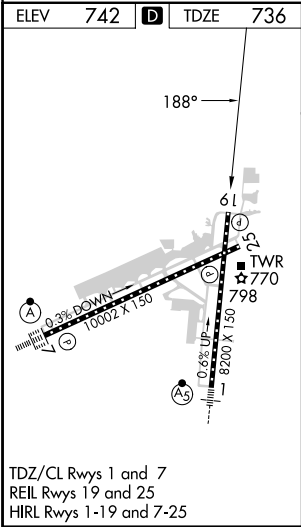


WAAS CH 40435 W19A	APP CRS 188°	Rwy Idg 8099 TDZE 736 Apt Elev 742
--	------------------------	--

RNAV (GPS) RWY 19
CHICAGO/ROCKFORD INTL (RFD)

RNP APCH - GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.				MISSED APPROACH: Climb to 2500 direct CONAN and hold.
ATIS 127.6	ROCKFORD APP CON 121.0 327.0	ROCKFORD TOWER 118.1 290.375	GND CON 121.9 290.375	CLNC DEL 119.25

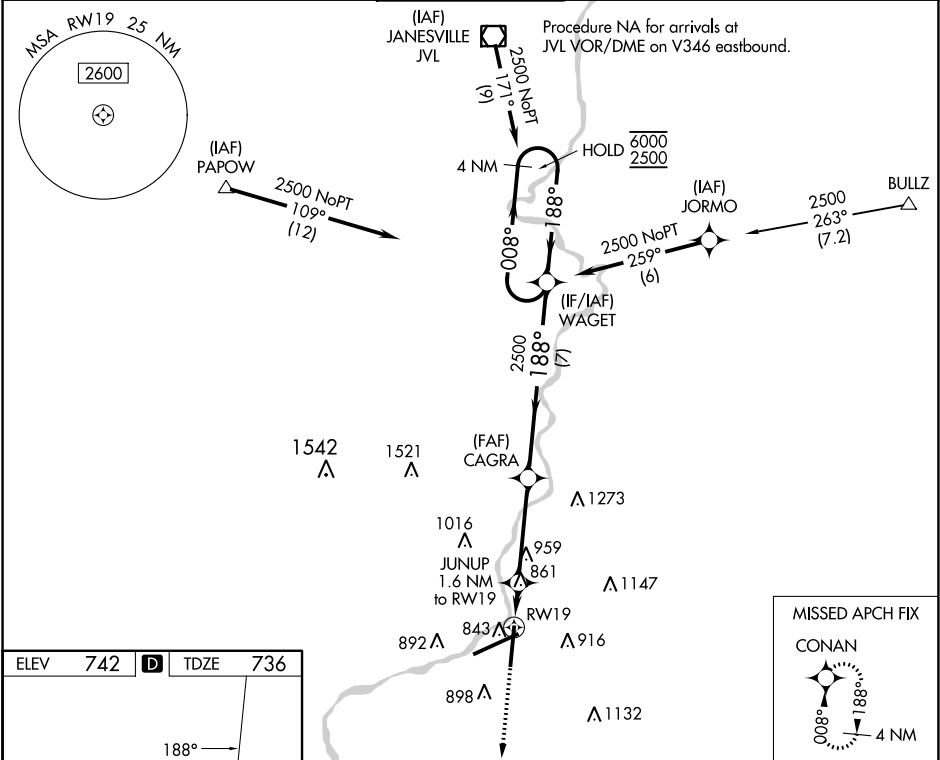

2500 CONAN		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).		4 NM Holding Pattern	
JUNUP 1.6 NM to RW19		CAGRA 2500		WAGET	
1 NM to RW19		1280		188°	
RW19		2500		GP 3.00°	
1 NM		0.6 NM		3.8 NM	
7 NM		TCH 50			
CATEGORY	A	B	C	D	
LPV DA	936-3/4 200 (200-3/4)				
LNAV/VNAV DA	1039-7/8 303 (300-7/8)				
LNAV MDA	1120-1	384 (400-1)	1120-1 1/2	384 (400-1 1/2)	
CIRCLING	1220-1 478 (500-1)	1280-1 538 (600-1)	1320-1 1/2 578 (600-1 1/2)	1460-2 1/4 718 (800-2 1/4)	