

WAAS CH 72822 W03A	APP CRS 029°	Rwy Idg TDZE Apt Elev	6501 246 246
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 3

RALEIGH EXEC JETPORT AT SANFORD-LEE COUNTY (TTA)


▼ Baro-VNAV NA when using Raleigh/Durham altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

▲ When local altimeter setting not received, use Raleigh/Durham altimeter setting and increase all DA 81 feet and all MDA 100 feet. Increase LNAV/VNAV all Cats visibility to 1½ mile, LNAV Cats C and D visibility to 1 mile, and Circling Cat C visibility to 2 mile and Cat D visibility to 2¾ mile. For inop MALS, increase LNAV/VNAV all Cats visibility to 1¼ mile and LNAV Cats C and D visibility to 1½ mile. For inop MALS when using Raleigh/Durham altimeter setting, increase LPV all Cats visibility to ¾ mile and LNAV Cats C and D visibility to 1½ mile. VDP NA when using Raleigh/Durham altimeter setting.

MALS

MISSED APPROACH:
Climb to 1300 then
climbing left turn to
2100 direct IKTOW
and hold.

AWOS-3 120.625	RALEIGH APP CON 125.3 353.675	UNICOM 123.075 (CTAF) 0	GCO 135.075
--------------------------	---	-----------------------------------	-----------------------

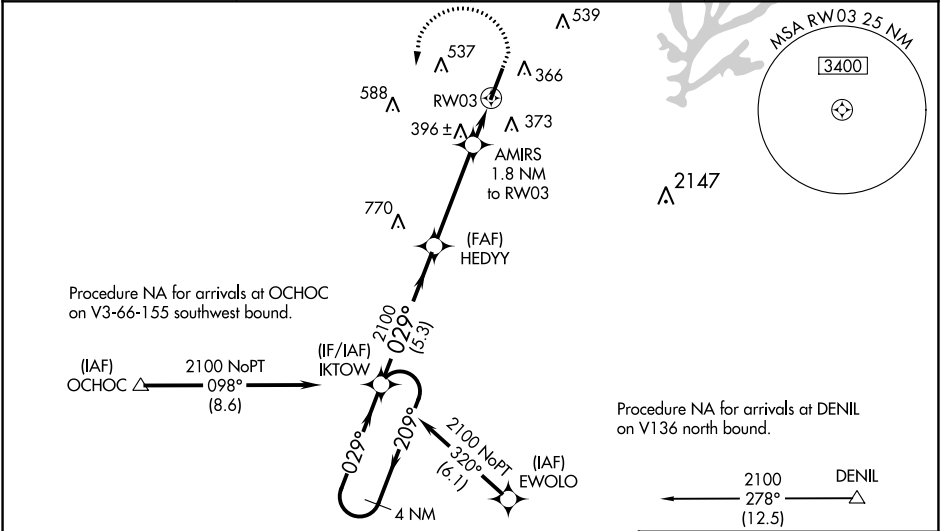

ELEV 246		TDZE 246	
----------	--	----------	--

4 NM Holding Pattern

IKTOW, HEDYY, AMIRS 1.8 NM to RW03, RW03, *860, 1300, 2100, IKTOW, *LNAV only.

GP 3.00° TCH 45, 2100, 209°, 029°, 2100, 5.3 NM, 3.9 NM, 0.6 NM, 1.2 NM, 0.3% Up, 12, 21, 25, 150, X 100, REIL Rwy 21, HIRL Rwy 3-21

CATEGORY	A	B	C	D
LPV DA	446-½ 200 (200-½)			
LNAV/VNAV DA	634-¾ 388 (400-¾)			
LNAV MDA	660-½ 414 (500-½)	660-¾ 414 (500-¾)		
CIRCLING	760-1 514 (600-1)	820-1 574 (600-1)	840-1½ 594 (600-1½)	960-2¼ 714 (800-2¼)

SE-2, 22 FEB 2024 to 21 MAR 2024

SE-2, 22 FEB 2024 to 21 MAR 2024