

LOM TU 420	APP CRS 001°	Rwy Idg 7150 TDZE 347 Apt Elev 347	NDB RWY 36 TUPELO RGNL (TUP)
----------------------	------------------------	---	--

▼

▲ NA


When local altimeter setting not received, use Columbus AFB altimeter setting and increase all MDA 120 feet, increase S-36 Cats C and D visibility ¾ SM and Circling Cats C and D ½ SM. For inop ALS, increase S-36 Cat A and B visibility to 1 SM and Cat C and D to 1¾ SM. For inop ALS when using Columbus AFB altimeter setting, increase S-36 Cat A and B visibility to 1 SM and Cat C and D to 1¾ SM.

MALSR

AS

MISSED APPROACH:
Climb to 1500 then
climbing left turn to 3000
direct TU LOM and hold.

ASOS 133.525	MEMPHIS CENTER 128.5 279.55	TUPELO TOWER ★ 118.775 (CTAF) 254.275	GND CON 121.825 254.275
------------------------	---------------------------------------	---	-----------------------------------

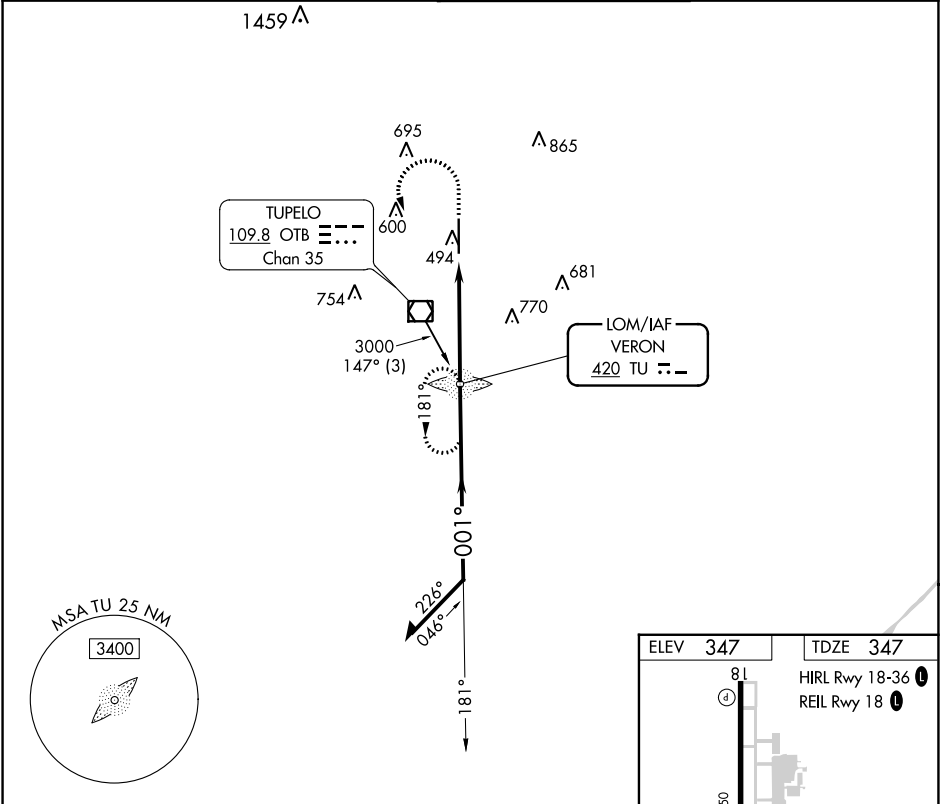

1500 3000 TU		TU LOM 181° Remain within 10 NM 2000 001° 2000 3.19° TCH 55 4.7 NM		7150 X 1 TWR 423 36 001° 4.7 NM from FAF FAF to MAP 4.7 NM						
CATEGORY	A	B	C	D	Knots	60	90	120	150	180
S- 36	840-¾ 493 (500-¾)		840-1 493 (500-1)		Min:Sec	4:42	3:08	2:21	1:53	1:34
CIRCLING	840-1 493 (500-1)		900-1½ 553 (600-1½) 1140-2½ 793 (800-2½)							