

WAAS CH 58221 W35A	APP CRS 348°	Rwy Idg TDZE Apt Elev	6300 5022 5022
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35

NEPHI MUNI (U14)

RNP APCH - GPS.


▼

NA

Baro-VNAV NA when using Provo altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 12°C. Circling NA for Cat C east of Rwy 17 and 35. Rwy 35 helicopter visibility reduction below ¾ SM NA. VDP NA with Provo altimeter setting. When local altimeter setting not received, use Provo altimeter setting: increase LPV DA to 5416 feet and visibility all Cats ½ SM, increase LNAV/VNAV DA to 5740 feet and visibility all Cats ½ SM; increase all MDAs 160 feet and LNAV visibility Cats B/C/D and Circling visibility Cats A/B ½ SM.

MISSED APPROACH:
Climb to 8200 then climbing left turn to 10600 direct PILTE and hold.

AWOS-3 118.275	SALT LAKE CENTER 127.825 239.025	UNICOM 123.075 (CTAF) 0
--------------------------	--	-----------------------------------

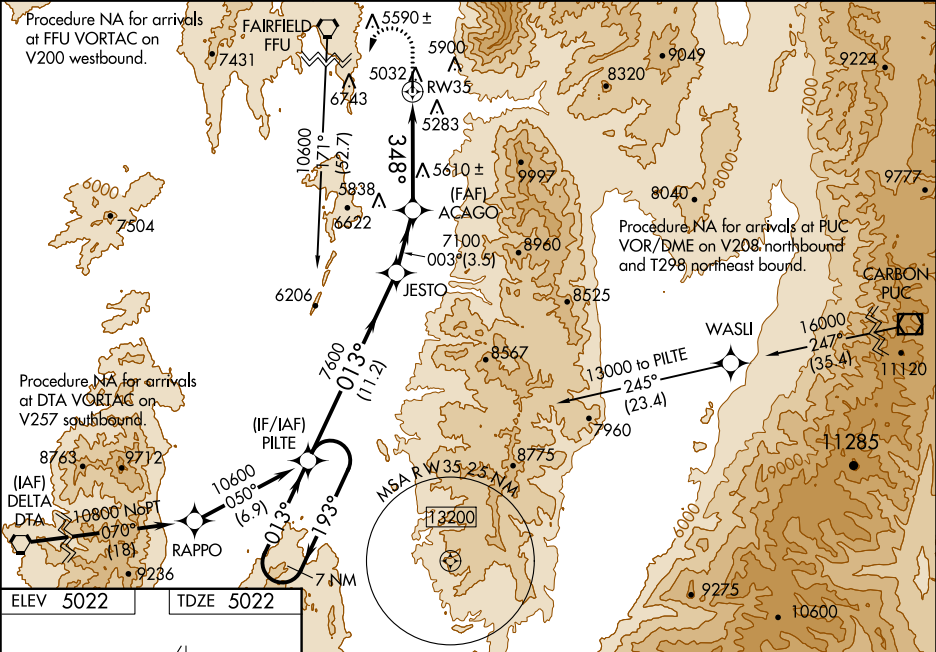

ELEV 5022 TDZE 5022

Z1

0.6% Up

6300 X 100

35

348°

MIRL Rwy 17-35

REIL Rws 17 and 35

8200 10600 PILTE *LNAV only. JESTO ACAGO PILTE 7 NM Holding Pattern				
2.6 NM 3.8 NM 3.5 NM 11.2 NM GP 3.00° TCH 40				
CATEGORY	A	B	C	D
LPV DA	5272-7/8 250 (300-7/8)			
LNAV/VNAV DA	5596-2 574 (600-2)			
LNAV MDA	5940-1¼ 918 (1000-1¼)		5940-2½ 918 (1000-2½)	
CIRCLING	5900-1¼ 878 (900-1¼)		6920-3 1898 (1900-3)	
				NA