

WAAS CH 49032 W14A	APP CRS 142°	Rwy Idg TDZE 1132 Apt Elev 1136
--	------------------------	---

RNAV (GPS) RWY 14

MORRIS MUNI/CHARLIE SCHMIDT FLD (MOX)



RNP APCH-GPS.

⚠

Circling NA to Rwy 4 and 22. Baro-VNAV and VDP NA when using Benson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Benson altimeter setting and increase LPV and LNAV/VNAV DA to 1440 feet. Increase all MDAs 60 feet and visibility LNAV Cat C ½ SM and visibility Circling Cat C ½ SM.

MISSED APPROACH: Climb to 3500 direct EXJUP and hold.

AWOS-3PT 118.6	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

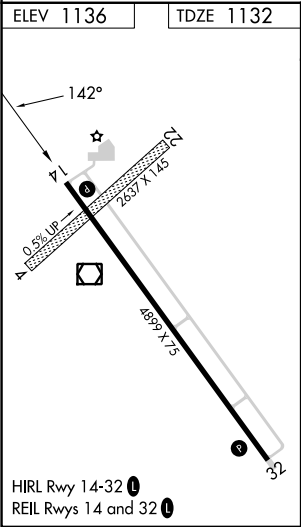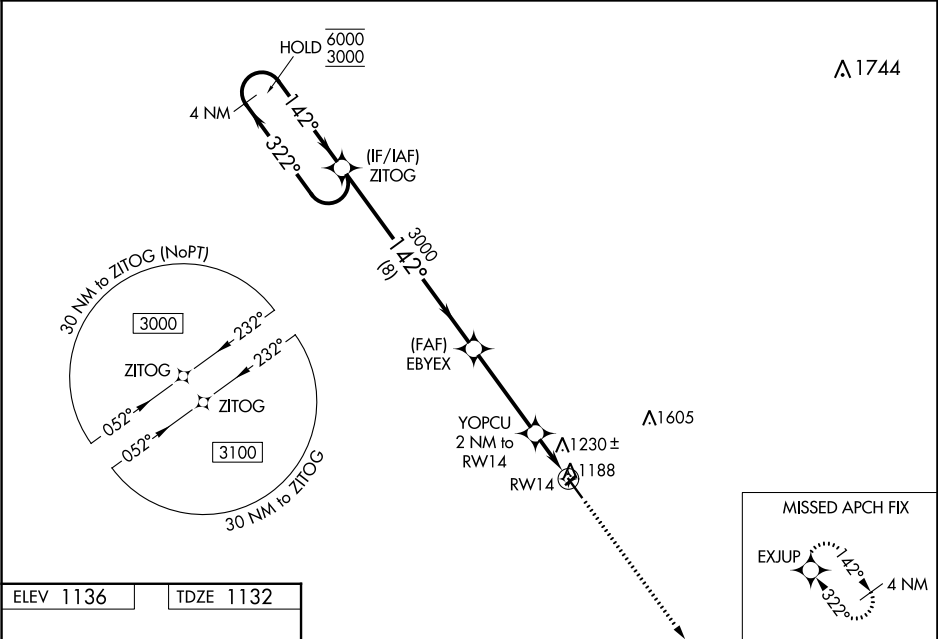

		ZITOG	EBYEX	YOPCU 2 NM to RWY14	3500	EXJUP
	4 NM Holding Pattern		3000			
	6000 ← 322° 3000 → 142°	142°	3000	1800		
	GP 3.00° TCH 40					
		8 NM	3.8 NM	1 NM	1 NM	
CATEGORY	A	B	C	D		
LPV DA	1382-1	250 (300-1)				NA
LNAV/VNAV DA	1382-1	250 (300-1)				NA
LNAV MDA	1480-1	348 (400-1)				NA
CIRCLING	1560-1 424 (500-1)	1600-1 464 (500-1)	1860-2 724 (800-2)			NA